


Federnde Druckstücke mit Innensechskant + Kugel 206 I

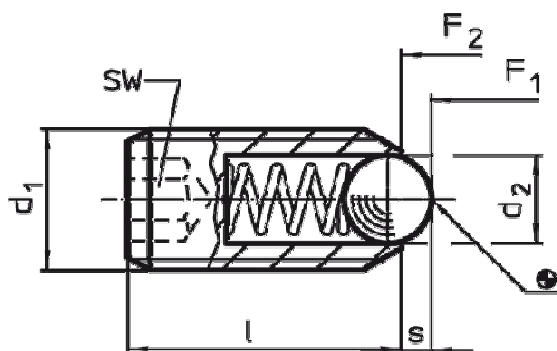

d ₁	d ₂	l	s	SW	Federkraft F ₁ N~*	Federkraft F ₂ N~*
M 4	2,5	10,0	0,8	2,0	6	12
M 5	3,0	14,0	0,9	2,5	7	13
M 6	3,5	15,0	1,0	3,0	9	15
M 8	5,0	18,0	1,5	4,0	20	35
M 10	6,0	23,0	2,0	5,0	25	45
M 12	8,0	26,0	2,5	6,0	35	60
M 16	10,0	33,0	3,5	8,0	65	110
M 20	12,0	43,0	4,5	10,0	80	120

* = statistischer Wert